

Historic, archived document


Do not assume content reflects current scientific knowledge, policies, or practices.



Repair Your **ELECTRIC CORDS**

... ATTACHING AN OUTLET PLUG

- Pull wires through opening, drawing each bundle around base of the prong to which the screw is attached.

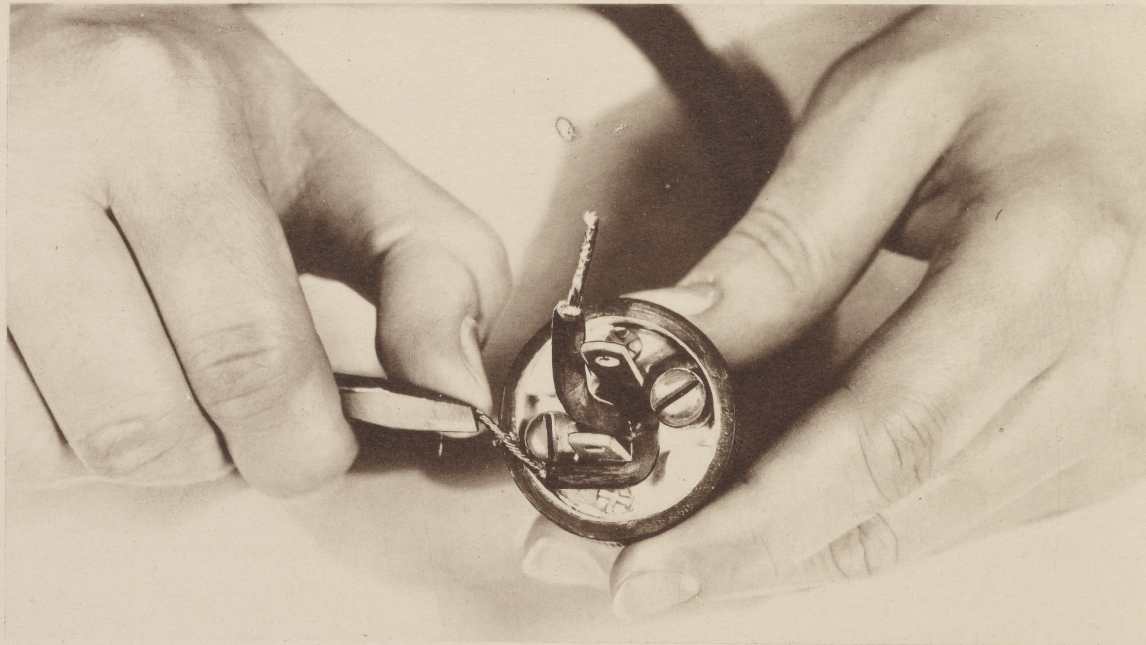


- Wrap once around the screw in the direction the screw turns. *Don't overlap wire.* Now tighten screw.



LIBRARY
RECEIVED
★ JUL 6 1943 ★
U. S. Department of Agriculture

In plug where prongs are attached to removable top

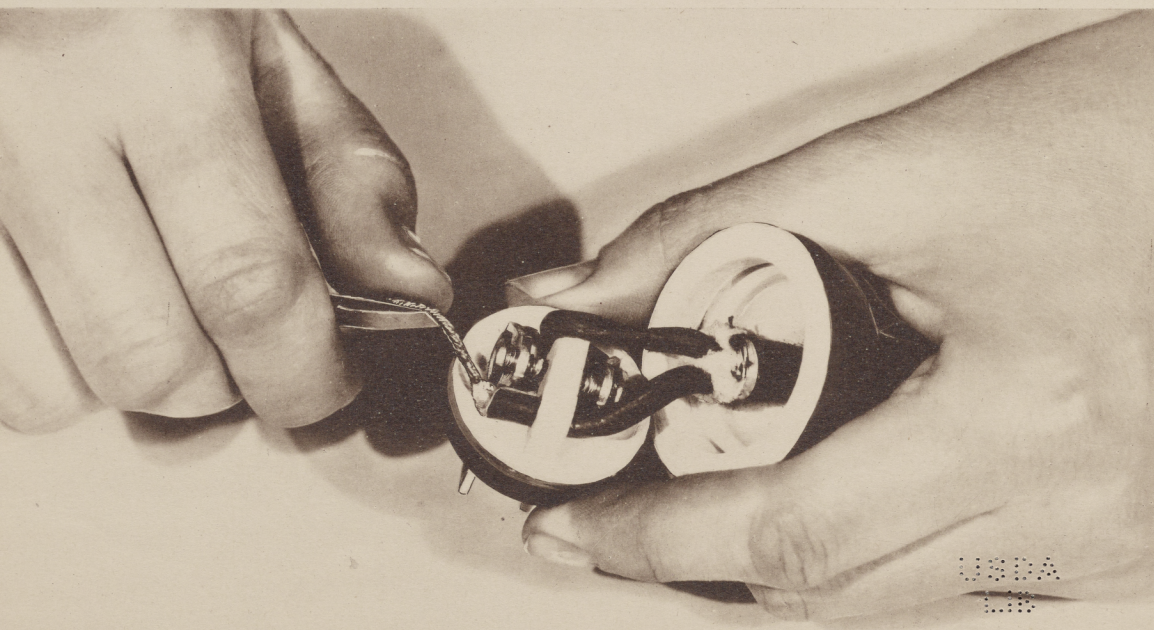

- Pull wires through holes in the part that separates the terminal screws. Attach wires to screws.... then replace top in cap.

USDA
LIB

For sale by the Superintendent of Documents, U. S. Government Printing Office, Washington, D. C.
☆ U. S. GOVERNMENT PRINTING OFFICE : 1943 - O - 528886

BUREAU OF HUMAN NUTRITION AND HOME ECONOMICS
U. S. DEPARTMENT OF AGRICULTURE